


Polyester Film

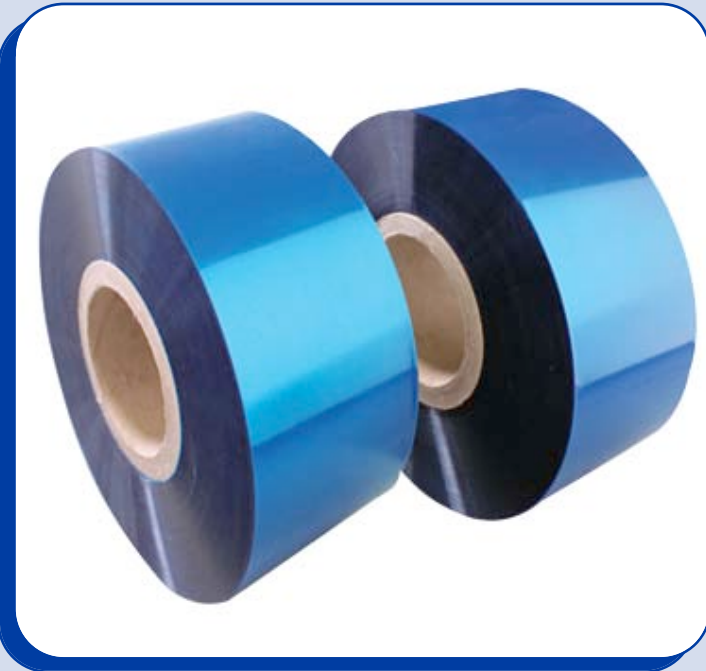

Features & Benefits

- Flexible & strong
- Durable
- Suitable for rubber roller and rubber hose manufacturers
- Sizes available 25mm, 50mm and 75mm wide
- 23 micron, 36 micron, 50 micron or 75 micron
- Supplied in 230mm diameter rolls
- Colour, clear

Larger widths or thicknesses are available; please contact our office with your dimensions and specifications.

Technical Specification

Property	Type	Units	23A	36A	50A	75A	Test method
Tensile Strength	MD/TD	MPa	200/240	230/280	200/240	190/230	ASTM D 882
Elongation at break	MD/TD	%	130/100	130/100	130/100	140/100	ASTM D 882
Modulus	MD/TD	MPa	3850/4450	3800/4500	3650/4100	3550/4000	ASTM D 882
Shrinkage 105 C for 30 min	MD/TD	%	0.5/0.5	0.5/0.5	0.5/0.5	0.5/0.5	ASTM D 1204
Shrinkage 150 C for 30 min	MD/TD	%	2.0/2.5	2.0/2.5	1.5/1.5	1.3/1.3	ASTM D 1204
Shrinkage 200 C for 30 min	MD/TD	%	4.5/6.0	6.5/6.2	4.0/4.0	3.5/3.3	ASTM D 1204
Haze%		%	12	30	27	36	ASTM D 1003
Dielectric Strength		KV	4.0	5.5	7.7	10	ASTM D 149
Standard Roll Length		M	1650	1050	750	500	

Order form

Date _____

Customer Order Number _____

Please Fax your order to 01484 600570

Polyester Film

Company: _____

Contact Name: _____

Address: _____

_____ Postcode: _____ Country: _____

Tel: _____ Fax: _____ Email: _____

Min Order QTY 50 kilos

PRODUCT CODE	DESCRIPTION	THICKNESS IN MICRONS				WIDTH OF ROLL	QUANTITIES	QUANTITY REQUIRED
		23	36	50	75			

C030	Polyester Film					25mm	50 to 100kg	
C031	Polyester Film					25mm	150 to 300kg	
C032	Polyester Film					25mm	350 to 1000kg	
C033	Polyester Film					50mm	50 to 100kg	
C034	Polyester Film					50mm	150 to 300kg	
C035	Polyester Film					50mm	350 to 1000kg	
C036	Polyester Film					75mm	50 to 100kg	
C037	Polyester Film					75mm	150 to 300kg	
C038	Polyester Film					75mm	350 to 1000kg	
C039	Custom Size							

Customers Special Instructions
