

Roll Activator KS100

Unit 8 Willows Business Park Shelley Huddersfield
West Yorkshire England HD8 8LU
T. +44 (0)1484 600560 F. +44 (0)1484 600570
email: info@rollertech.co.uk

www.rollertech.co.uk



KS100 with additional 1m left and right roller guide extension options



Roller guide system




KS100 with optional V brush guide system



Pneumatic pressure control and adjustment



KS100 system with Mobile Extraction

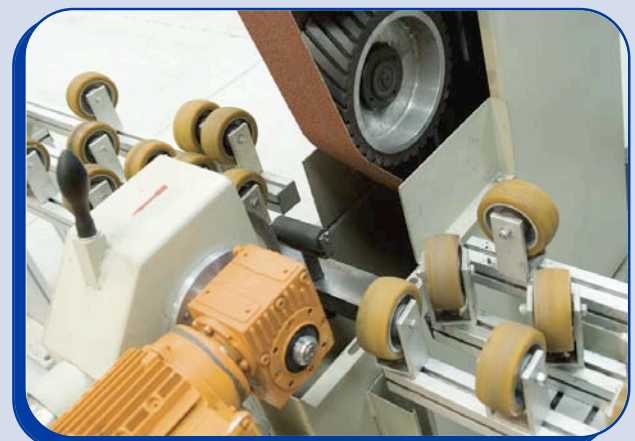

Guide Wheel

Roll Activator KS100

Performance

The centre less roll activator allows you to:

Take off the remaining residue of the old rubber coating
Roughen the surface to increase the surface area
Activate the metal surface needed for reliable bonding

Outstanding Features include:

Variable travelling speed
Wide range of roughness available
Variable pressures
High process speed
Extremely user friendly

Technical Specification

415 Volt 3 Phase 50 Hz

Motor 4Kw

1450 / 2900 rpm with soft start

Belt length 100mm x 4000mm

Feed speed infinitely variable

Diameter range 10mm to 250mm

Pneumatic belt tensioning

Options

Soft start optional

Additional 1m Roller Guide system

V Brush guide system

